



Basic Specifications			
Product Name		Lithium Manganese Dioxide(Li-MnO ₂) Battery	
Model		CR123A	
Nominal voltage		3.0V	
Capacity	Nominal	1300 mAh	
	Minimum	1200 mAh	
Discharge Cut-off Voltage		2.0V	
Max constant discharge current		1500mA	
Max. pulse current		3000mA	
Operating Temperature		-40~ +60℃	
Storage Temperature		-10~ +40℃	
Relative humidity		65±20%	
Period of Validity		5 year	
Dimensions	Diameter	11.5 mm	
	Height	10.5 mm	
Weight(Approximately)		10g	


Dimensions : (Unit: mm)

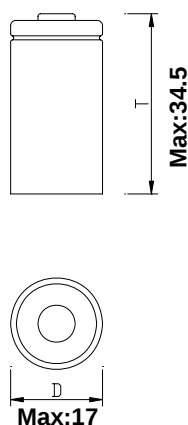


Discharge performance @ 25℃

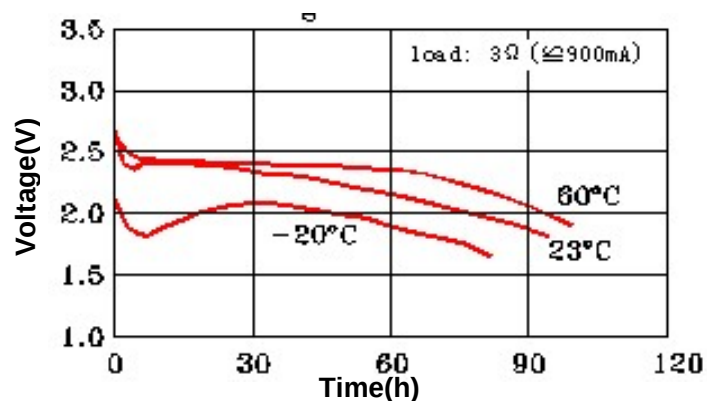

Discharge Characteristics On Temperature

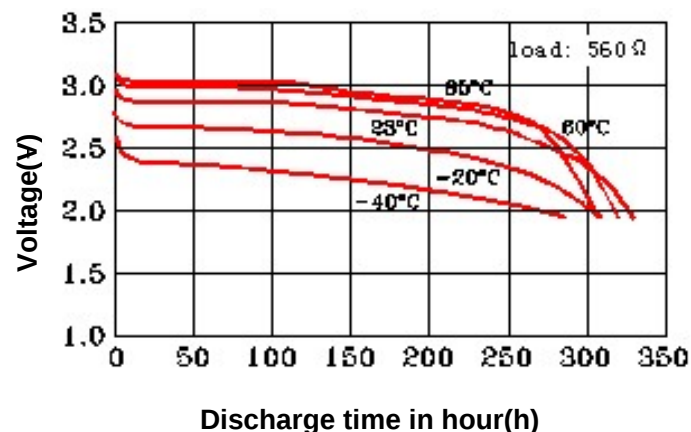

Plus Discharge Characteristics

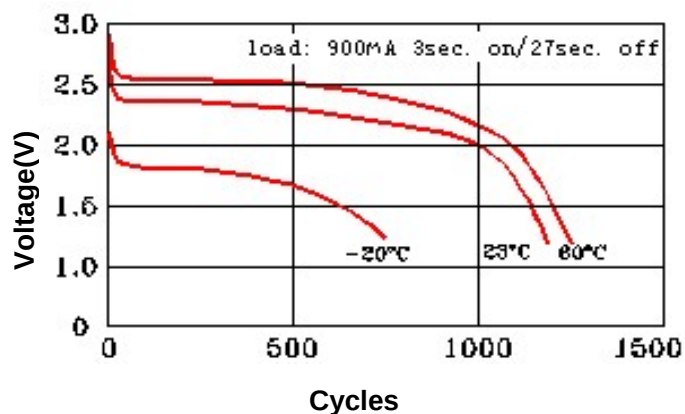

WARNING:

- Do not recharge, short circuit, crush, disassemble, heat above 100℃ incinerate.
- Do not place the battery in heater, washer or high-pressure container.
- Stop using when the battery become heat, emit smell or appear other abnormality during use or storing.

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice