



Basic Specifications	
Product Name	Lithium and Iron Disulfide (Li-FeS ₂) Battery
Model	LFB AA 2900mAh
Nominal Voltage	1.70V ~1.86V
Impedance	≤350mΩ
Typical Capacity(300mA)	2900 ±50 mAh
Working Voltage	1.30V at 1000mA discharge rate
Max. Discharge Current	2000 mA continuous
Discharge Cut-off Voltage	0.80V
Volume	8.0 cubic centimeters
Weight	Approx. 15.0~15.8 g
Lithium Content	Less than 1 gram per cell
Dimensions	Diameter: 14.0±0.5 mm
	Height: 49.85±0.65 mm
Operating Temp.	-20 °C to 60 °C
Storage Temp.	-20 °C to 40 °C
Storage Humidity	≤75 %
Shell Life	5 Years

Dimensions in mm(inches)

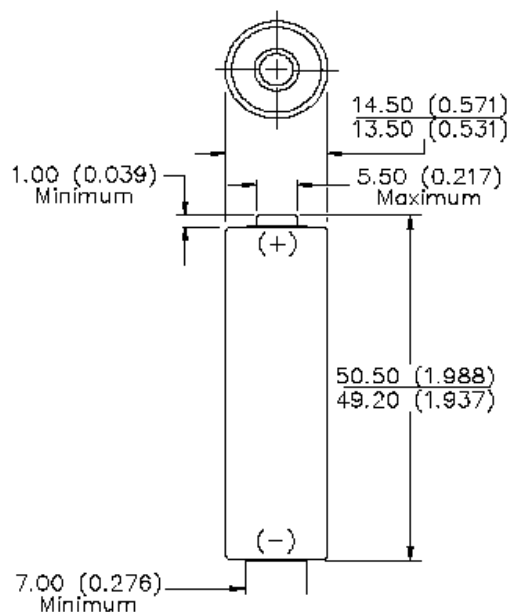

Typical Discharge Curve

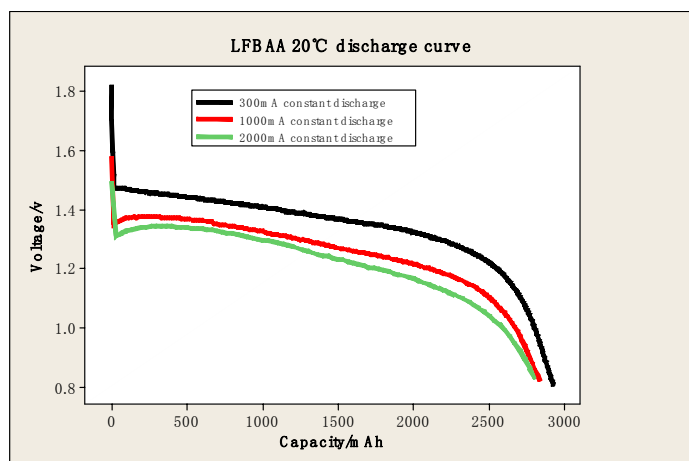

WARNING:

- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not place the battery in heater, washer or high-pressure container.
- Stop using when the battery become heat, emit smell or appear other abnormality during use or storing.

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice