




Dimension:unit(mm)

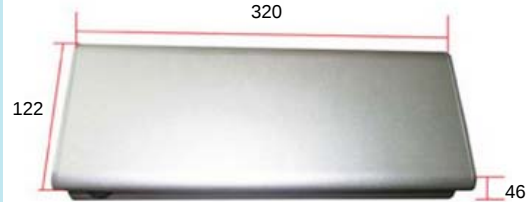

| Model No.   | Configuration               | Voltage | Capacity | Nominal Rate | Charger Voltage Limit | Charger Current Limit | Approx Weight |
|-------------|-----------------------------|---------|----------|--------------|-----------------------|-----------------------|---------------|
| EJCA36V-06A | Panasonic CGR18650CG -10S4P | 36V     | 9.0Ah    | 324Wh        | 42V                   | 3A                    | 2.70Kg        |
| EJCA36V-06B | Panasonic NCR18650-10S4P    | 36V     | 11.6Ah   | 417Wh        | 42V                   | 3A                    | 2.70Kg        |
| EJCA36V-06C | Samsung ICR18650-22F-10S4P  | 36V     | 8.8Ah    | 317Wh        | 42V                   | 3A                    | 2.70Kg        |
| EJCA36V-06D | Samsung ICR18650-26F -10S4P | 36V     | 10.4Ah   | 374Wh        | 42V                   | 3A                    | 2.70Kg        |
| EJCA36V-06E | Panasonic CGR18650CH -10S4P | 36V     | 8.8Ah    | 317Wh        | 42V                   | 5A                    | 2.70Kg        |
| EJCA36V-06F | Samsung ICR18650-22P -10S4P | 36V     | 8.4Ah    | 302Wh        | 42V                   | 5A                    | 2.70Kg        |

### ● Cycle Life

Standard charge mode, keep for 30min;Standard discharge mode:>500cycle,70%

### ● Standard Charge Model

Charge to 42V with constant current ,then charge with constant voltage till current less than 300mA.

Use special charger:CC+CV,2A,42V/300mA

### ● Options

Standard BMS: overcharge protection, overdischarge protection ,overcurrent protection balance&high temperature protection

Smart BMS,Standard BMS functions,scale,communication,sleep,encode,tailights blinking,5V USB output

### ● Certificate

FCC,CE,MSDS